


Marketing Drawing for 6030-11-KIT

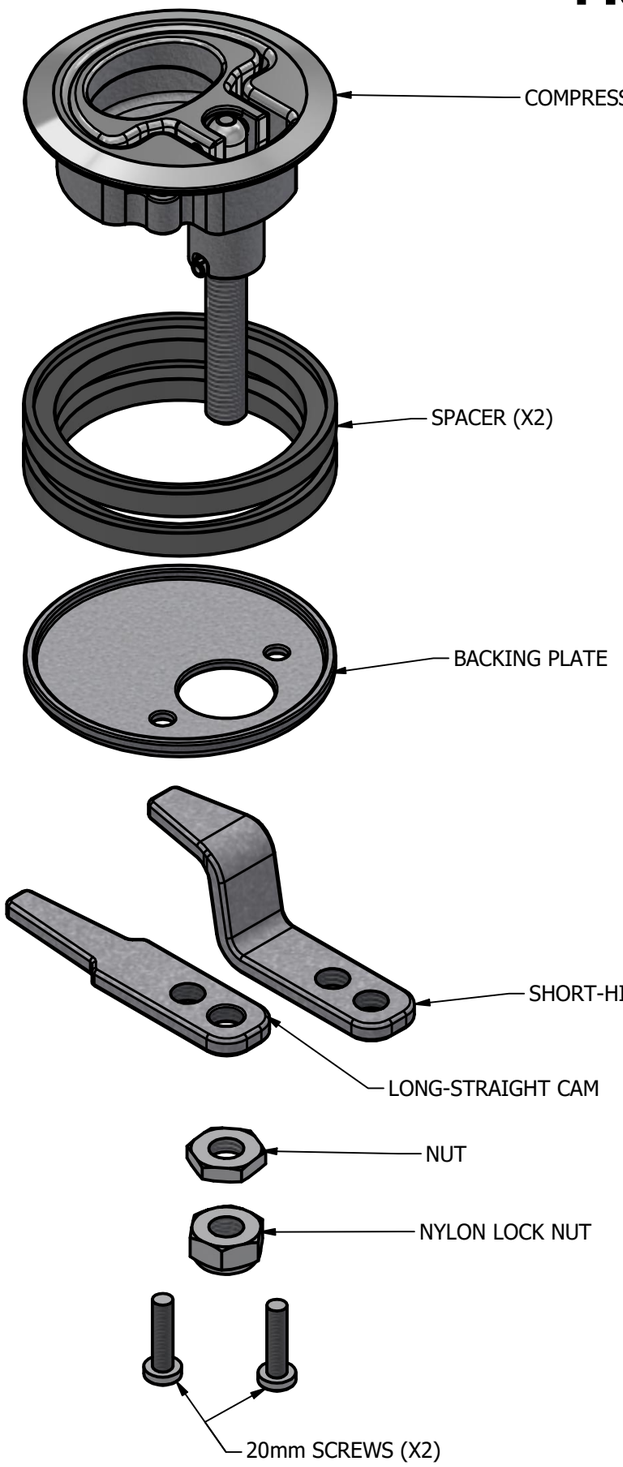

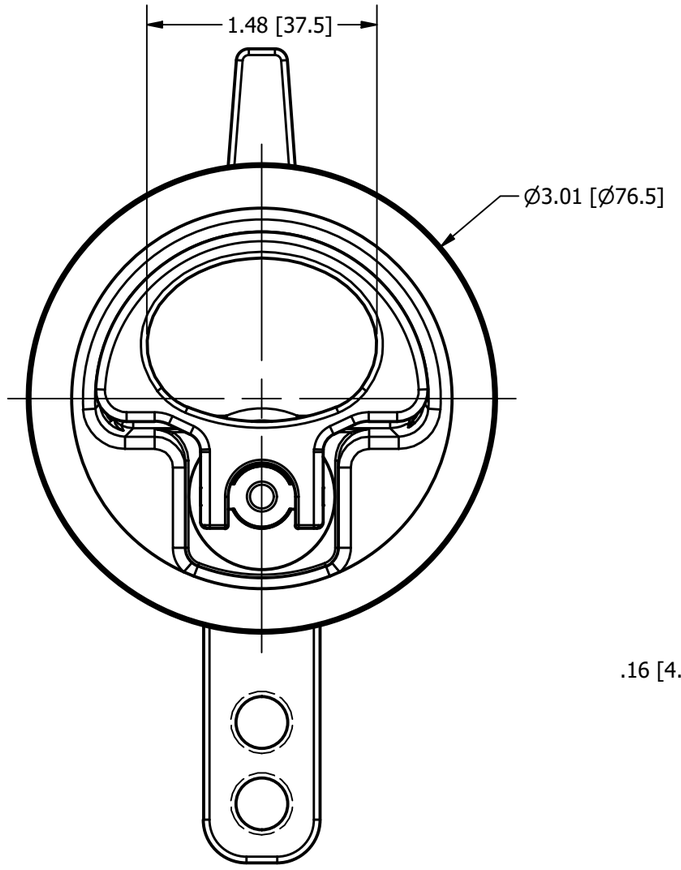

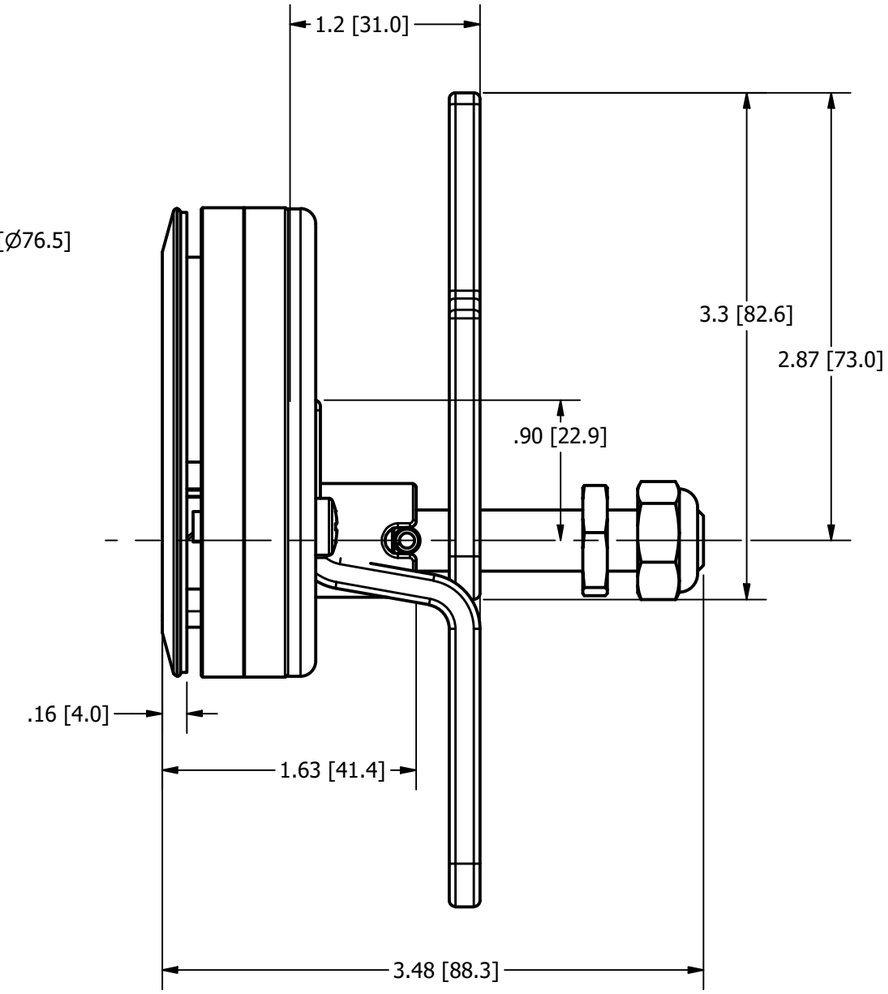

*NOTES
1) SPACER NEEDED FOR INSTALLATION THICKNESS LESS THAN 0.64".
2) MINIMUM CAM DISTANCE: 2.35". MAXIMUM CAM DISTANCE: 2.87"
3) FOR HOLE SIZE: 2.5"

PARTS LIST

ITEM	QTY	PART NUMBER	DESCRIPTION
4	1	C30-69	2.5" COMPRESSION CAM LONG-STRAIGHT
3	1	C30-48	2.5" COMPRESSION LATCH SHORT-HIGH CAM
2	1	P30-5	2.5" BACKING PLATE KIT
1	1	6030-11	2.5" COMPRESSION LATCH NL, REVERSIBLE HANDLE


GEM PRODUCTS, INC.


Description
2.5" NL COMPRESSION KIT WITH SAFETY CAMS


Size	Part No	Rev	Scale
A3	6030-11-KIT	0	1:1

Phone: 800.874.4506 | www.gemlux.com

Marketing Drawing for 6030-11-KIT

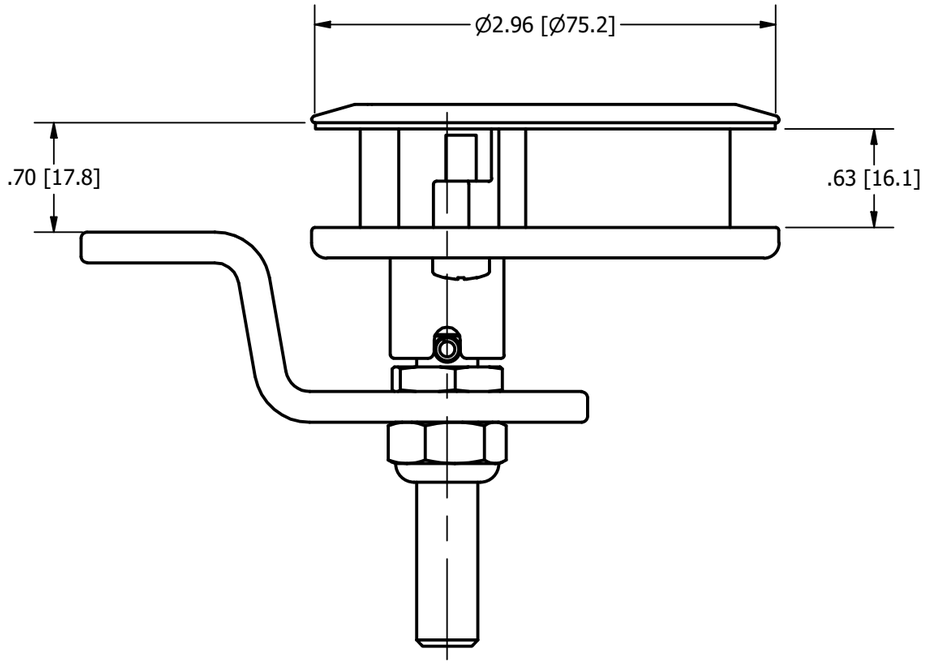

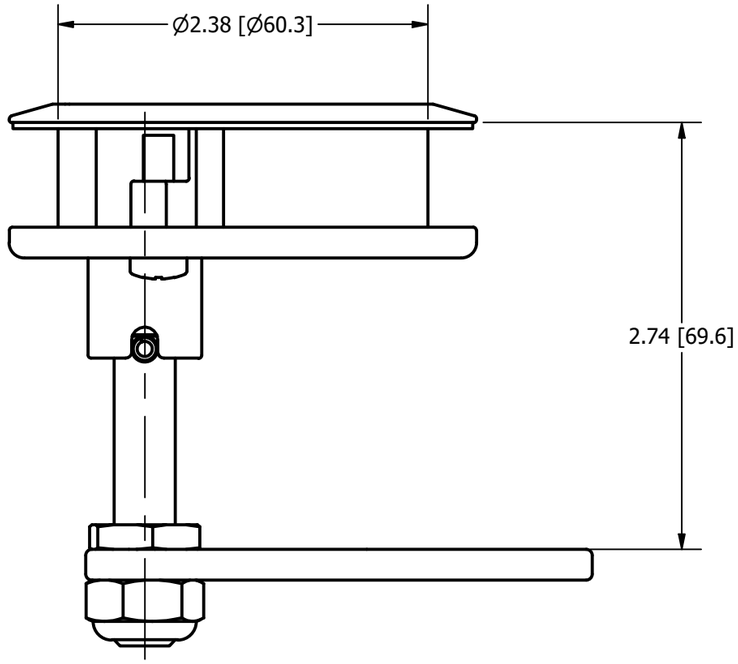

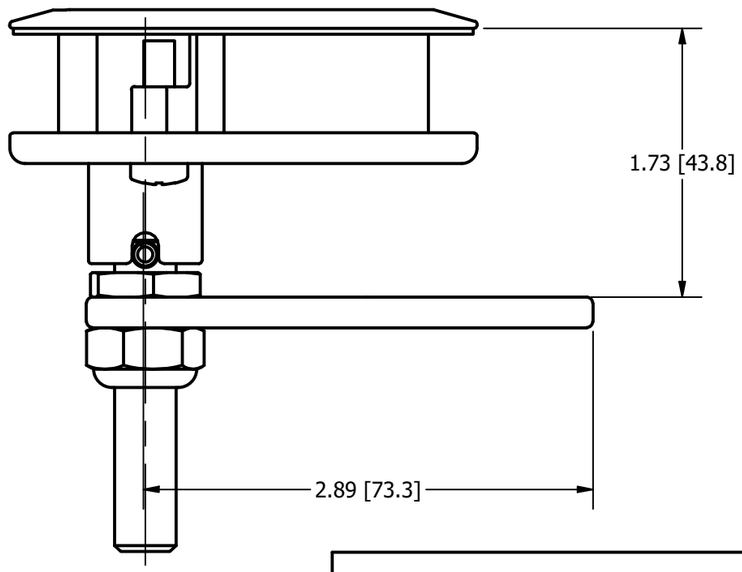

*NOTES
1) SPACER NEEDED FOR INSTALLATION THICKNESS LESS THAN 0.64".
2) MINIMUM CAM DISTANCE: 2.35". MAXIMUM CAM DISTANCE: 2.87"
3) FOR HOLE SIZE: 2.5"

GEM PRODUCTS, INC.

Description
2.5" NL COMPRESSION KIT WITH SAFETY CAMS

Size	Part No	Rev	Scale
A3	6030-11-KIT	0	1 : 1

Phone: 800.874.4506 www.gemlux.com